

M20x75

+ 1x NAKRĘTKA (ISO 4032)  
+ 1x PODKŁADKA (DIN 7989)  
+ 2x PODKŁADKA (DIN 6918)  
+ 1x ZAWLECZKA (ISO 1234)

Special bolts



Hex. bolt K8.8

1x Split pin ISO 1234, 6,3x63

M30x100

M30x155

+ 2x NAKRĘTKA (ISO 4032)  
+ 2x PODKŁADKA (DIN 7989)  
+ 1x ZAWLECZKA (ISO 1234)

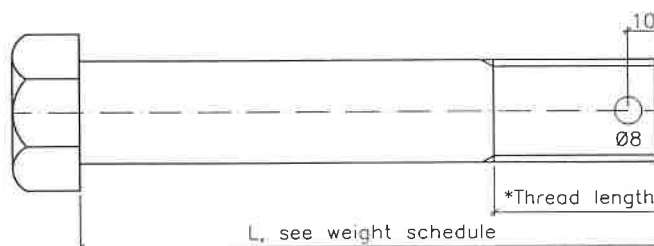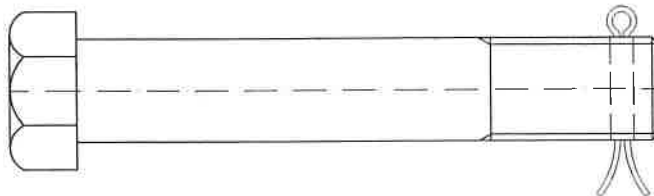

\*) Thread length:

M45 = 60

M42 = 60

M39 = 55

M36 = 55

M33 = 50

M30 = 50

M27 = 45

M24 = 45

M22 = 40



M20 = 40

M24x65

M24x240

+ 1x NAKRĘTKA (ISO 4032)  
+ 1x PODKŁADKA (DIN 7989)  
+ 1x ZAWLECZKA (ISO 1234)

M33x105 } + 2x NAKRĘTKA (ISO 4032)  
M33x170 } + 2x PODKŁADKA (DIN 7989)  
+ 1x ZAWLECZKA (ISO 1234)

|  |                  |   |         |  |        |
|--|------------------|---|---------|--|--------|
| 01   | 09.12.2021       | Issued  | LH      | EM   | RJ     |
| REV.   | DATO             | BESKRIVELSE   | KONSTR. | KONTR.   | GODKJ. |
| Format<br>A4                                     | Målestokk<br>1:2 |  |         |  <b>JØSOK PROSJEKT AS</b> |        |
| STANDARD DRAWING<br>Special bolts with split pin |                  |   |         |  |        |
|  |                  |   |         | S-D-0002   |        |
| Erstatter dokument                               |                  |   |         |  |        |