


TECHNICAL DATA

CAPACITY	9 m ³ /h
CONVEYOR LENGTH	5.100 m
CONVEYOR ANGLE	0°
SCREW ROTATION SPEED	16 RPM
WEIGHT	1670 kg

COMPONENTS

MOTOR	4 Kw DRE 125SL 400V 1500 RPM
GEAR	FA 87G E880E1 M6
ZERO SPEED SWITCH	XSA-VI0017 Telemecanique
PROXIMITY SWITCH	XSG-300MAL2 Telemecanique

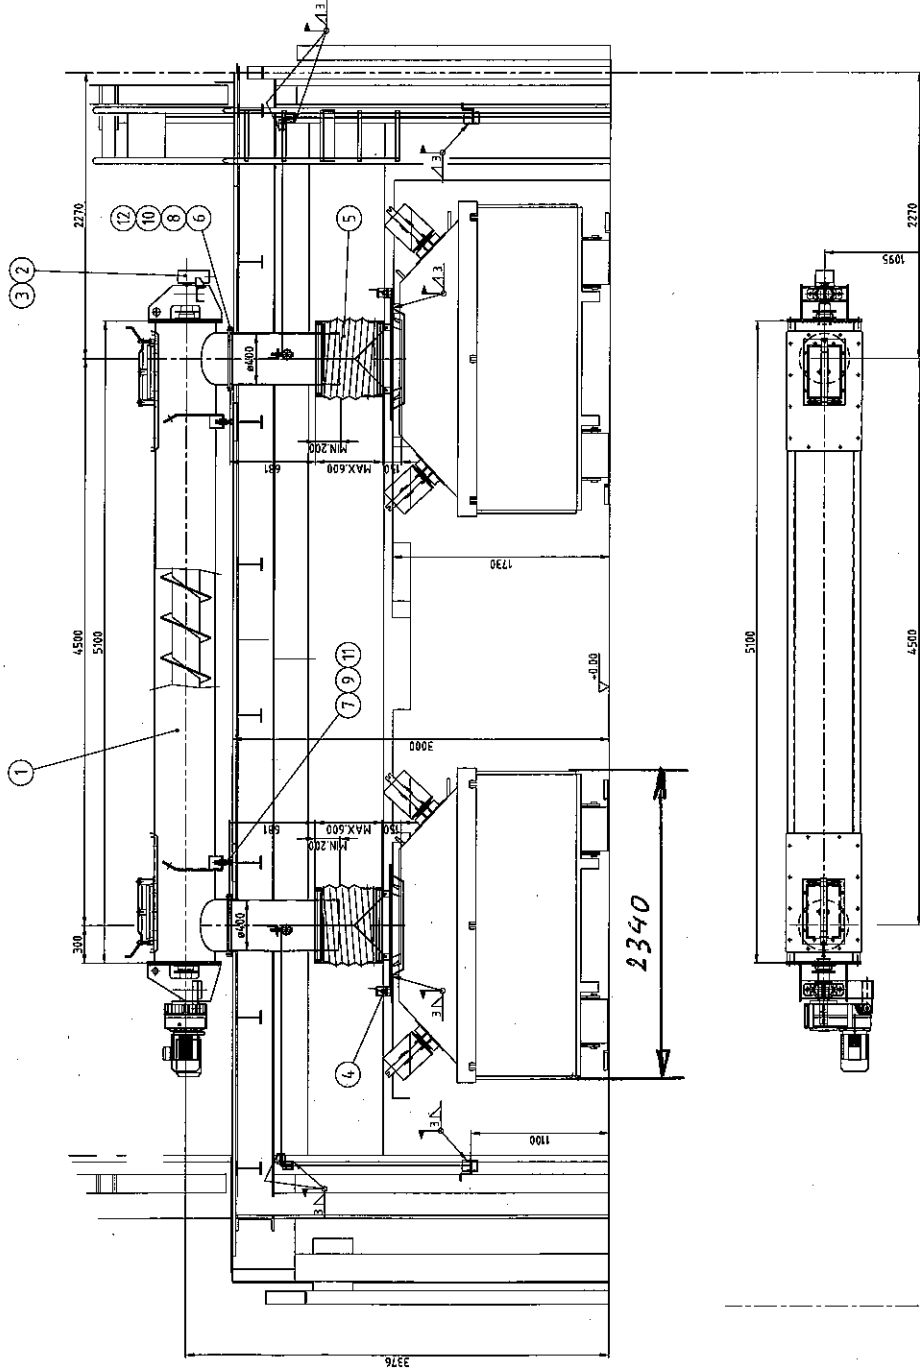

Protective paint area 18 m²
 Protective area 23 m²
 Weight 1670 kg

12	Sealing rope, glass fiber 5mm	1	3541382	0.1
11	Motor 4 Kw DRE 125SL 400V 1500 RPM	1	8700491	0.1
10	Reducer FA 87G E880E1 M6	1	8700491	0.1
9	Hexagon nut M24	8	8400643	0.1
8	Hexagon nut M24	8	8400643	0.1
7	Hex screw, full thread M24x160	8	8200984	2.2
6	Hex screw, full thread M24x55	8	8200984	0.9
5	Loading ballows	2	P301097	25.5
4	Proximity switch	2	431T584	0.6
3	Retracting guard Z-3 PCT	1	P302353	2
2	Zero speed switch	1	431T584	0.6
1	XSA-VI0017 Telemecanique	1	P301097	25.5
0	Distributing screw conveyor D=400 L=5100	1	P301097	25.5

C Raumaster Oy				
Distributing screw conveyor D=400 L=5100				
Metso / Szczecin				
P1019602				

